

i60 Specs

- **Weight:** 1477 lbs.
- Capacity: 6 People
- Overall Dimensions LxWxH: 134inx49inx75in
- Colors: White, Black, Sangria, Orange, Purple, Torch Red, Champagne, Yellow, Lime Green, Forest Green, Caribbean Blue, Silver, Indigo Blue

Body Configuration


- Windshield: Foldable Acrylic/Optional DOT Acrylic
- **Roof:** Innovative air deflecting design with full high-strength aluminum frame
- **Body:** Injection Molded Thermoplastic that is both stylish and resilient to outside damage
- Mirrors: Fully Adjustable and Foldable
- **Floor:** High-Density Polyethylene molded for extra strength and toughness with Rubber Floor Mat
- Wheels: 10 or 12 Inch Machined Face Aluminum with Powder Coated Accents
- Tires: 205/50R10 6 Ply Nylon Cord or 215/35R12 4 Ply Nylon Cord
- **Front Suspension:** Macpherson Style Fully Independent Coil Over Shock with Camber Adjustment.
- Rear Suspension: Solid Axle Coil Over Shock and Stabilizing Bar
- **Drivetrain:** 10.5:1 or 14:1 High Speed Rear Axle
- Chassis: Tubular Powder Coated Steel Frame
- Instrumentation: Fully Integrated Digital Instrument Cluster
- Lighting and Signals: Single Combination Switch for LED Projector Hi & Lo Beam Headlights, LED Signal Lights, Taillights, and Horn
- Safety Restraint: Side Hip Restraint & Retractable Seat Belts
- **Braking System:** Four Wheel Disk Brakes and Electromagnetic Parking Brake System
- Steering: Self-Adjusting Double-Ended Rack and Pinion
- Dash Components: Forward/Neutral/Reverse Switch, USB and 12V Plugs, Cubby Storage, Multiple Cup Holders, Key Switch, Instrumentation Cluster
- **Seats:** Marine Grade Vinyl, Custom Stitched Panel, Single Color, Color Matched with White or Black Accents. Fold Flat Rear Seat for Hauling.

Electrical Systems

- Controller: 450A ICON Controller
- Motor: 48V ICON 5KW 3 Phase High Torque Motor
- Charger: ICON 48V On-Board Charging System with Body Mounted Charge Indicator
- Batteries: (6) 8 Volt Sealed Maintenance-Free AGM





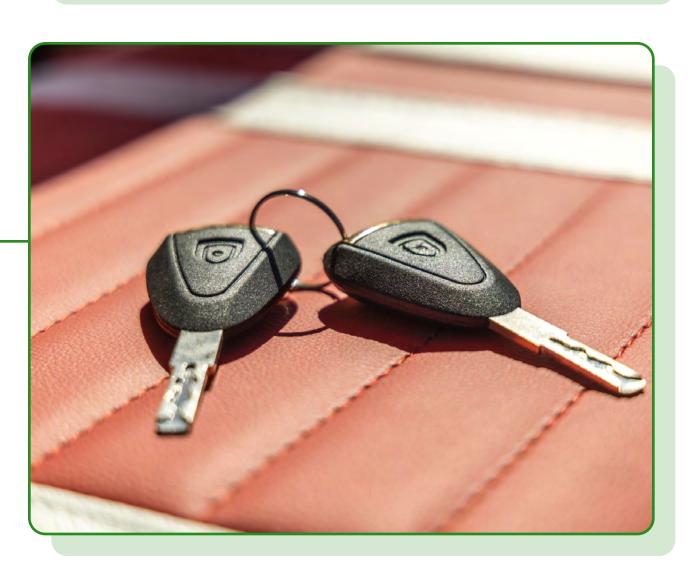



www.ICONBahamas.com sales@iconbahamas.com (242) 603-ICON (4266)